

HD+ 120i VV


Tandem roller with two vibrating roller drums
Tandem rollers Series HD+ / Series H243



HIGHLIGHTS HD+

- > 3-point articulation for even weight distribution and excellent on-centre feel
- > Operating concept Easy Drive
- > Electronic machine management Hammtronic
- > Excellent view of the machine and the construction site
- > Track offset for comfortable start up, moving away and compacting at curb edges

Machine dimensions		
Total length (L)	mm	5300
Width (B)	mm	2145
Total height (H)	mm	2980
Drum width (X)	mm	1980/1980
Height loading, min. (HI)	mm	2140

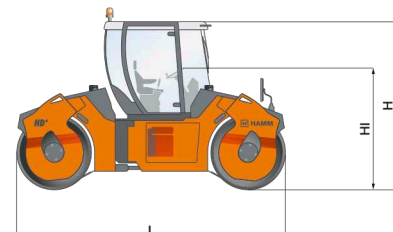

TECHNICAL DATA		Unit	HD+ 120i VV
	Weights		
	Operating weight with cab	kg	12475
	Operating weight with ROPS	kg	12235
	Operating weight, max.	kg	13390
	Static linear load, front/rear	kg/cm	31,6/31,4
	Machine dimensions		
	Total length	mm	5300
	Total height with cab	mm	2980
	Height loading, min.	mm	2140
	Wheel base	mm	3900
	Total width with cab	mm	2145
	Max. working width	mm	2150
	Ground clearance, left/right	mm	900/900
	Turning radius, inside	mm	6280
	Drum dimensions		
	Drum width, front/rear	mm	1980/1980
	Drum diameter, front/rear	mm	1400/1400
	Drum thickness, front/rear	mm	19/19
	Drum type, front		smooth/non-divided
	Drum type, rear		smooth/non-divided
	Track offset, left/right	mm	170
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 4.1 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		115,0/156,4/2300
	Power rating SAE J1349, kW/HP/rpm		115,0/154,1/2300
	Emission standard		EU Stage IV / EPA Tier 4
	Exhaust gas after-treatment		DOC-DPF-SCR
	Drive		
	Speed, working gear	km/h	0-6,0
	Speed, transportation gear	km/h	0-12,0
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	35/40
	Vibration		
	Vibration frequency, front, I/II	Hz	40/50
	Vibration frequency, rear, I/II	Hz	40/50
	Amplitude, front, I/II	mm	0,89/0,35
	Amplitude, rear, I/II	mm	0,89/0,35
	Centrifugal force, front, I/II	kN	173/95
	Centrifugal force, rear, I/II	kN	173/95
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	260
	AdBlue/DEF tank, content	L	20
	Water tank, capacity	L	1145
	Sound level		
	Acoustic power LW(A), sticker		109
	Acoustic power LW(A), measured		107

EQUIPMENT

2 water pumps, Foldable scraper, Tilttable dashboard, Operating concept Easy Drive, Spring-mounted driver's seat with armrests and safety belt, Hammtronic - electronic machine management, Seat-operating unit, can be moved and rotated laterally, Track offset, Vibration parameters, adjustable individually, Spray system with spray bars front and rear, Water filtering (triple), Water tank front and rear, can be filled from both sides, Central water drain, Handrails on the operator's platform

OPTIONAL EQUIPMENT

HCO Navigator, Steering column with comfort exit and tilttable dashboard, Multifunction armrest, right, foldable, ROPS cabin with non-split doors, Rotating beacon, Protective roof, ROPS cabin with split doors, Working lights, Back-up alarm (reversing), Frequency control, Anti-freeze injection system, Speedometer, HAMM Temperature Meter (HTM), Heating and air conditioning, Heating, Track offset display, Edge pressing and cutting equipment, Radio, ROPS, rigid, Automatic engine-off function, Drum edge lighting, Telematics interface, Coming home lighting

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

