

H 10i P

Compactor with padfoot drum
Compactors Series H / Series H235





HIGHLIGHTS H

- > 3-point articulation for excellent traction and cross-country mobility
- > Operating concept Easy Drive
- > Electronic machine management Hammtronic
- > Excellent view of machine and construction site
- > High compaction performance due to linear load and big amplitudes







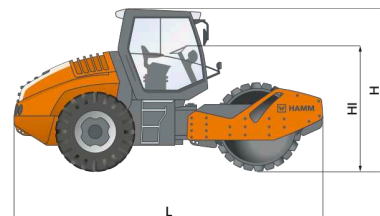





Machine dimensions

Total length (L)	mm • in	230.3 • 230.3
Width (B)	mm • in	89.9 • 89.9
Total height (H)	mm • in	116.5 • 116.5
Drum width (X)	mm • in	84.3 • 84.3
Height, loading, min. (HI)	mm • in	90.9 • 90.9



EU Stage
IV/EPA Tier
4

TECHNICAL DATA		Unit	H 10i P
	Weights		
	Operating weight with cab	kg • lbs	11975 • 26,405
	Operating weight with ROPS	kg • lbs	11725 • 25,854
	Operating weight, max.	kg • lbs	13110 • 28,908
	Axle load, front/rear	kg • lbs	6550/5425 • 14,443/11,962
	Machine dimensions		
	Total length	mm • in	5850 • 230.3
	Total height with cab	mm • in	2960 • 116.5
	Height, loading, min.	mm • in	2308 • 90.9
	Wheelbase	mm • in	3150 • 124.0
	Total width with cab	mm • in	2284 • 89.9
	Ground clearance, center	mm • in	390 • 15.4
	Turning radius, inside	mm • in	3870 • 152.4
	Angle of driving slope, front/rear		53/32
	Drum dimensions		
	Drum width, front	mm • in	2140 • 84.3
	Drum diameter, front	mm • in	1684 • 66.3
	Drum thickness, front	mm • in	15 • 0.6
	Drum type, front		Padfoot
	Height of padfeet	mm • in	100 • 3.9
	Padfeet, number		140
	Wheel dimensions		
	Size of tires, rear		TR 23.1-26 12 PR
	Diesel engine		
	Manufacturer		DEUTZ
	Type		TCD 3.6 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		85,0/115,6/2300
	Power rating SAE J1349, kW/HP/rpm		85,0/113,9/2300
	Emission standard		EU Stage IV/EPA Tier 4
	Exhaust gas after-treatment		DOC-SCR
	Drive		
	Speed, infinitely variable	km/h • mph	0-12,0 • 0.0-7.5
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off		57/62
	Vibration		
	Vibration frequency, front, I/II	Hz • vpm	30/36 • 1,800/2,160
	Amplitude, front, I/II	mm • in	1,90/0,80 • .075/.031
	Centrifugal force, front, I/II	kN • lbs	246/136 • 55,350/30,600
	Steering		
	Oscillation angle +/-		10
	Steering, type		Articulated steering
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L • Gal	280 • 74.0
	AdBlue/DEF tank, content	L • Gal	32 • 8.5
	Sound level		
	Acoustic power LW(A), sticker		104
	Acoustic power LW(A), measured		101

EQUIPMENT

2 large working and rear view mirrors, 2 multiply-adjustable armrests, 3-point articulation, Storage bin, lockable, Dashboard with displays, indicator lights and function key, Automatic traction control and anti-slip control, Operating concept Easy Drive, ECO mode, Speed preselect, Cup holder, Hammtronic—electronic machine management, Hose protection on front vehicle, Vibration-isolated operator's platform, Space for cooler, Stepless hydrostatic all-wheel drive, Automatic vibration system, ROPS, rigid

OPTIONAL EQUIPMENT

HCQ navigator, Rotating seat adapter, Steering column with comfort exit and tiltable dashboard, Rotating beacon, Dozer blade, Protective roof, Padfoot shell, Auxiliary heater, Working light, Back-up alarm, Frequency control, Radio, ROPS cabin with heating, FOPS-approved (level I), ROPS cabin with heating and air conditioning, FOPS-approved (level I), Safety belt monitoring device, Automatic engine-off function, Engine hood with electrical easy access engine cover release, Telematics interface, WIFMS fleet management interface

WIRTGEN AMERICA

6030 Dana Way
 Antioch, TN 37013
 615-501-0600
 Fax 615-501-0691
www.wirtgen-group.com/america

HAMM AG

Hammstraße 1
 D-95643 Tirschenreuth
 Tel. +49 9631 80-0
 Fax +49 9631 80-111
www.hamm.eu



HAMM